

Power Dividers In-Phase, 4-Way

Applications

- Wilkinson Networks
- Power Amplifiers
- GSM and AMPS frequencies
- Channel Combining
- Base Stations / Wireless Infrastructure



Features


- Commercial Grade
- 4 Way Power Split
- In Phase
- Low Loss
- Flush Mounting
- Lightweight
- 100% Tested

Electrical Specifications

Frequency <i>GHz</i>	Isolation <i>dB Min</i>	Insert. Loss <i>dB Max</i>	Return Loss <i>dBMin</i>
0.8 - 1.0	20	0.25	20
Amp. Bal. <i>dB Max</i>	Phase Bal. <i>Degrees Max</i>	Load Dissipation <i>Watts</i>	
±0.10	±1.0	0.750	

Notes: Electrical And Mechanical Specifications subject to change without notice. Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements.

Outline Drawing

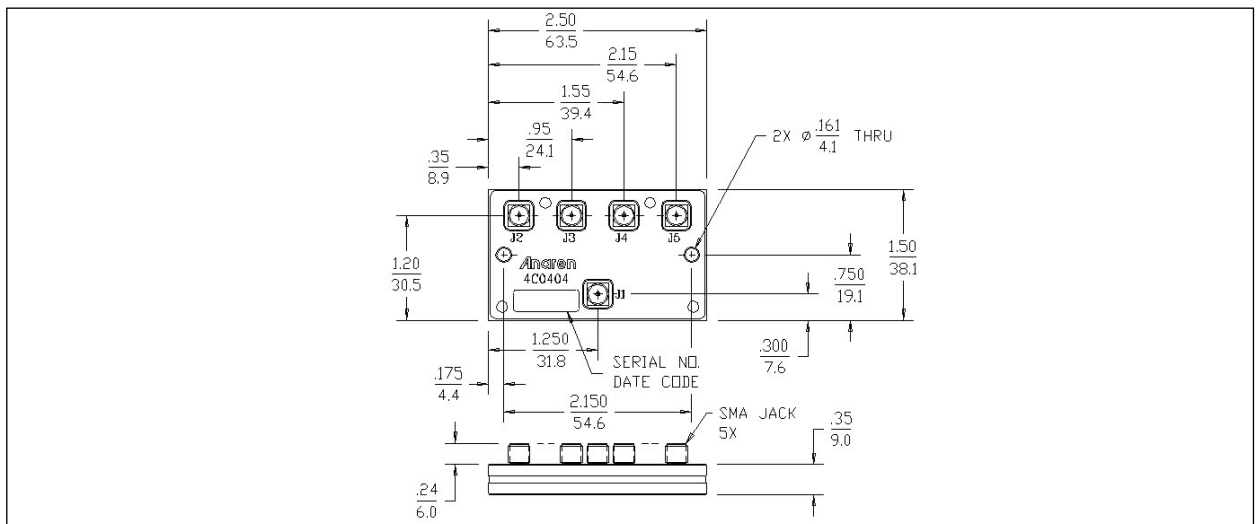

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121
 Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369